

# 427 Apex

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Catalog Number	MODEL	WATTS	FINISH	OPTION(S)	LENGTH
Example: 427-2LED9-BRZ-TL-35K-24"	<b>427</b>	-	-	-	-




### Features:

- Versatile up/down luminaire available in a horizontal mount
- Simple design makes the unit extremely efficient
- Bottom lens standard. Top is open for maximum efficiency
- Custom laser cut images available. Consult factory for pricing
- Standard 0-10V dimming driver. 120-277V MVOLT
- Suitable for dry or damp locations
- Manufactured in the USA

### Dimensions

Width	Height	Depth
26"	6"	4.875"
38"	6"	4.875"

Fun, creative, decorative! Optional laser cut images in the fixture face make the Apex a designer's choice when coordinating the theme of an environment.

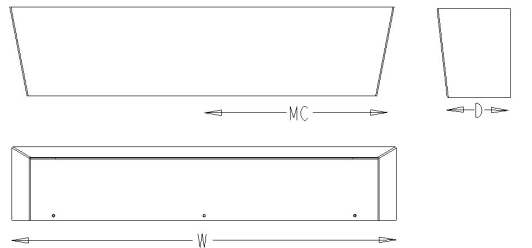

A 4" octagonal junction box should be used for installation

MC = Mounting Center, located at center of fixture unless noted otherwise

### Ordering Information/Options

	Watts			Finishes		Options		Length	
	Model	Lumens	Dimmer	Finish	Color	Option	Description	Length	Depth
24"	2LED9	2200 Lumens	MVOLT	WHT	White	DL	Damp Label	24"	24"
	2LED14	3100 Lumens		BLK	Black	TL	Top Lens	36"	36"
36"	2LED9	2200 Lumens	MVOLT	SAL	Silver	IMAGE	Custom image provided by customer		
	2LED14	3100 Lumens		BRZ	Bronze	30K	3000 Kelvin Temperature		
						35K	3500 Kelvin Temperature		
						40K	4000 Kelvin Temperature		
						IEM	Integral Emergency Pack		

**Indessa**  
Lighting

PHONE: 509.924.0243

www.indessa.com

Indessa Lighting reserves the right to make design revisions without prior notice.

