


436 Defender

Project: _____

Location: _____


Catalog Number	MODEL	WATTS	FINISH	OPTION(S)
Example: 436-1LED14-SAL-TL-40K	436	-	-	-

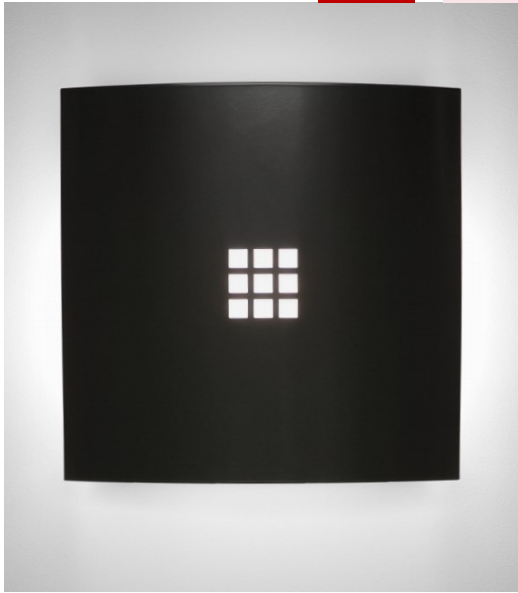

Features:

- Popular look with optimal light distribution
- Custom laser cut images available. Consult factory for pricing
- All acrylic is mechanically attached for maximum longevity. Bottom lens standard
- No visible fasteners
- Standard 0-10V dimming driver. 120-277V MVOLT
- Suitable for dry or damp locations
- Meets all ADA requirements
- Manufactured in the USA

Dimensions

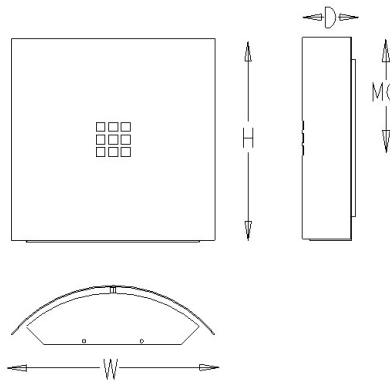

Width	Height	Depth	MC
14"	14"	3.75"	6.5"

The Defender is a traditional sconce constructed of metal. Nine decorative windows provide illumination and style to the fixture.

A 4" octagonal junction box should be used for installation

MC = Mounting Center, located at center of fixture unless noted otherwise

Ordering Information/Options

Model	Watts	Finishes	Options
436	1LED9	1100 Lumens	DL Damp Label TL Top Lens IMAGE Custom image provided by customer 30K 3000 Kelvin Temperature 35K 3500 Kelvin Temperature 40K 4000 Kelvin Temperature IEM Integral Emergency Pack
	1LED14	1550 Lumens	
	1LED19	2000 Lumens	
		WHT White BLK Black SAL Silver BRZ Bronze	

Indessa
Lighting

PHONE: 509.924.0243

www.indessa.com

Indessa Lighting reserves the right to make design revisions without prior notice.

