


522 Wet Loc Window Box

Project: _____

Location: _____

Catalog Number	MODEL	WATTS	FINISH	OPTION(S)
Example: 522-1LED14-BRZ-30K	522	-	-	-

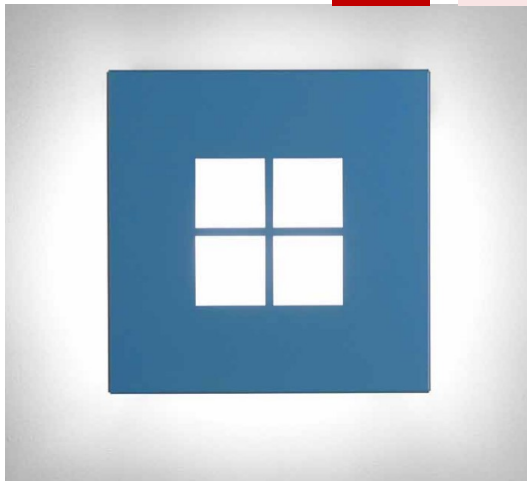


Providing light both upwards and downwards, this appealing fixture significantly highlights a building's architecture at night and during the daylight hours.

Features:

- Modern "light marker" with enhancing light windows
- Colored lens available
- Fully enclosed and gasketed fixture
- No visible fasteners
- All lens mechanically attached for long life retention
- Standard 0-10V dimming driver. 120-277V MVOLT
- Listed and approved for wet locations
- Manufactured in the USA

Dimensions

Width	Height	Depth	MC
14"	14"	5"	6.5"

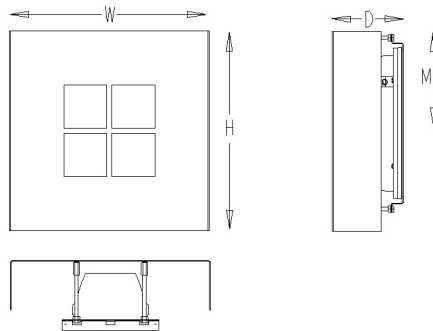

A 4" octagonal junction box should be used for installation

MC = Mounting Center, located at center of fixture unless noted otherwise

Ordering Information/Options

Model	Watts			Finishes		Options	
522	1LED9	1100 Lumens	MVOLT	WHT	White	TP	Tamperproof Nuts
	1LED14	1550 Lumens		BLK	Black	LBLUE	Blue Lens
	1LED19	2000 Lumens		SAL	Silver	LGREEN	Green Lens
	1LED23	2500 Lumens		BRZ	Bronze	LRED	Red Lens
					1WIN	One 8" window	
					MOD18	18"x18" fixture	
					30K	3000 Kelvin Temperature	
					35K	3500 Kelvin Temperature	
					40K	4000 Kelvin Temperature	
					IEM	Integral Emergency Pack	

Indessa
Lighting

PHONE: 509.924.0243

www.indessa.com

Indessa Lighting reserves the right to make design revisions without prior notice.

