

574 Softglow

Project: _____

Location: _____

Catalog Number	MODEL	WATTS	FINISH	OPTION(S)
Example: 574-1LED19-WHT-35K	574	-	-	-





A soft glow around the center band of the luminaire provides drama to this rectangular shaped fixture. Add additional character with a two tone powder coat finish.

Features:

- An ideal luminaire for retail lighting marking and highlighting a building
- Design provides a soft glow around the center band of the fixture
- Available "DKSKY" option for areas requiring dark sky compliancy
- Design allows for two-tone powder coat finishes
- Fully enclosed and gasketed electrical compartment
- Standard 0-10V dimming driver. 120-277V MVOLT
- Listed and approved for wet locations
- Manufactured in the USA

Dimensions

Width	Height	Depth	MC
15.3"	14"	6.375"	6.5"

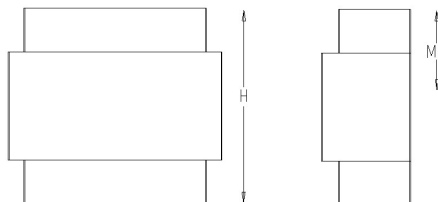

A 4" octagonal junction box should be used for installation

MC = Mounting Center, located at center of fixture unless noted otherwise

Ordering Information/Options

Model	Watts			Finishes		Options	
574	1LED9	1100 Lumens	MVOLT	WHT	White	TP	Tamperproof Nuts
	1LED14	1550 Lumens		BLK	Black	2TONE	Two Tone Powder Coat Finish
	1LED19	2000 Lumens		SAL	Silver	30K	3000 Kelvin Temperature
	1LED23	2500 Lumens		BRZ	Bronze	35K	3500 Kelvin Temperature
						40K	4000 Kelvin Temperature
						DKSKY	Dark Sky Compliant
						IEM	Integral Emergency Pack

Indessa
Lighting

PHONE: 509.924.0243

www.indessa.com

Indessa Lighting reserves the right to make design revisions without prior notice.

