


642 Wet Location Fuse

Project: _____

Location: _____

Catalog Number	MODEL	LENGTH/WATTS	FINISH	OPTION(S)
Example: 642-24LED10-BRZ-40K	642	-	-	-

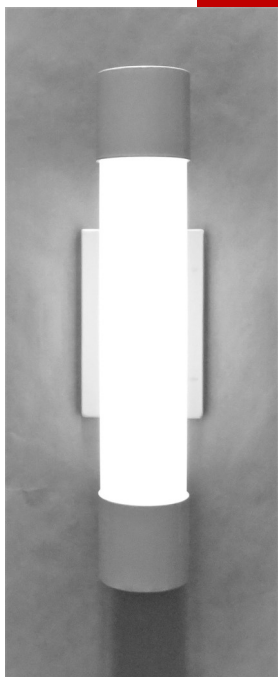


Features:

- Solid aluminum frame and 3" endcaps highlight this classic design
- Brushed aluminum or powder coated finishes available
- Offered in a wide variety of lumen packages
- Standard 0-10V dimming driver. 120-277V MVOLT
- Listed and approved for wet locations
- Meets all ADA requirements
- Manufactured in the USA

Dimensions

Width	Height	Depth
4.5"	18"	4"
4.5"	24"	4"
4.5"	36"	4"
4.5"	56"	4"

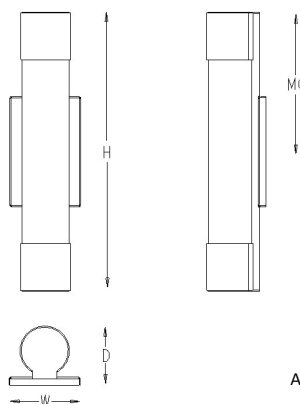

3" endcaps make a bold statement on this simple design. The Fuse provides a stunning accent on columns or in hallways. Although shown vertically, this fixture can be mounted horizontally, increasing its versatility. 18" fixture shown in photo.

A 4" octagonal junction box should be used for installation

MC = Mounting Center, located at center of fixture unless noted otherwise

Ordering Information/Options

Model	Length	Watts			Finishes		Options	
642	18	LED9	1100 Lumens	MVOLT	WHT	White	30K	3000 Kelvin Temperature
		LED10	1500 Lumens		BLK	Black	35K	3500 Kelvin Temperature
		LED16	2500 Lumens		SAL	Silver	40K	4000 Kelvin Temperature
	24	LED10	1500 Lumens	MVOLT	BRZ	Bronze	IEM	Integral Emergency Pack
		LED16	2500 Lumens		BA	Brushed Aluminum		
		LED21	3500 Lumens					
	36	LED14	2000 Lumens	MVOLT				
		LED20	3000 Lumens					
		LED24	4000 Lumens					
	56	LED24	4000 Lumens	MVOLT				
		LED32	5600 Lumens					
		LED40	7000 Lumens					

Indessa
Lighting

PHONE: 509.924.0243

www.indessa.com

Indessa Lighting reserves the right to make design revisions without prior notice.

