


362 Arch

Project: _____

Location: _____

Catalog Number	MODEL	LENGTH/WATTS	FINISH	OPTION(S)
Example: 362-46LED20-BA-35K	362	-	-	-

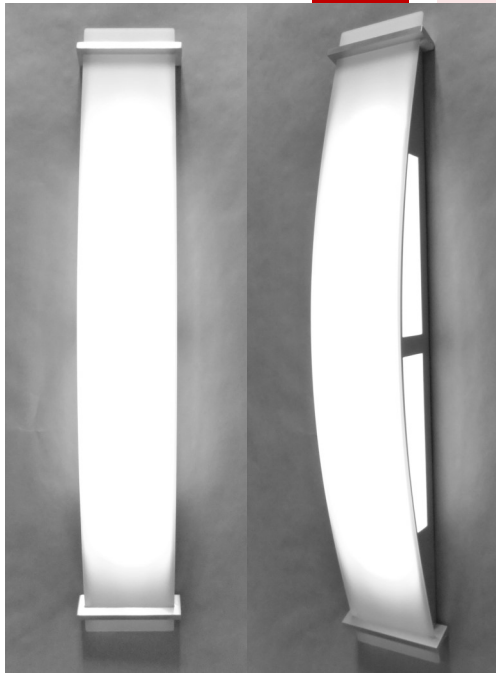


The uninterrupted band of frosted acrylic gives this fixture its sleek design. 3/8" aluminum bars provide a decorative element at either end. The ability to mount vertically or horizontally gives this fixture extra versatility.

Features:

- An uninterrupted 1/8" frosted opal acrylic lens provides maximum light output
- Mounts vertically or horizontally
- Brushed aluminum or powder coated finishes available
- Offered in a wide variety of lumen packages
- Standard 0-10V dimming driver, 120-277V MVOLT, 80 CRI
- Suitable for dry or damp locations
- Meets all ADA requirements
- Buy American Act Compliant

Dimensions

Width	Height	Depth
22"	5.75"	4"
34"	5.75"	4"
46"	5.75"	4"

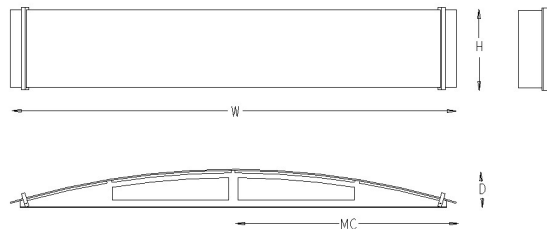

A 4" octagonal junction box should be used for installation

MC = Mounting Center, located at center of fixture unless noted otherwise

Ordering Information/Options

Model	Length	Watts			Finishes		Options	
362	22	LED10	1500 Lumens	MVOLT	WHT	White	DL	Damp Label
		LED16	2500 Lumens		BLK	Black	30K	3000 Kelvin Temperature
		LED21	3500 Lumens		SAL	Silver	35K	3500 Kelvin Temperature
	34	LED14	2000 Lumens	MVOLT	BRZ	Bronze	40K	4000 Kelvin Temperature
		LED20	3000 Lumens		BA	Brushed Aluminum	IEM	Integral Emergency Pack
		LED24	4000 Lumens					
	46	LED14	2000 Lumens	MVOLT				
		LED20	3000 Lumens					
		LED24	4000 Lumens					

Indessa
Lighting

PHONE: 509.924.0243

www.indessa.com

Indessa Lighting reserves the right to make design revisions without prior notice.

