


# 364 Fillin

**Project:** \_\_\_\_\_

**Location:** \_\_\_\_\_

Catalog Number	MODEL	LENGTH/WATTS	FINISH	OPTION(S)
Example: 364-48LED30-WHT-35K	364	-	-	-

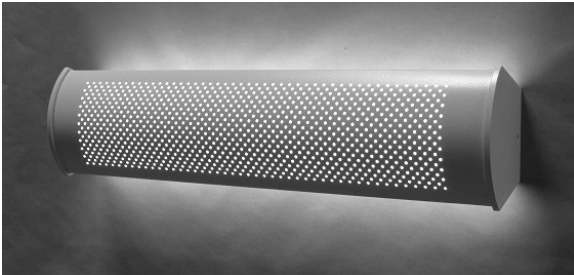


A perforated front softens the look, while top and bottom lens allow for ample up and down light. The Fillin provides extra versatility with its ability to mount horizontally or vertically.

## Features:

- A perforated front panel reduces fixture glare while allowing ample up and down light
- Mounts vertically or horizontally
- Brushed aluminum or powder coated finishes available
- Offered in a wide variety of lumen packages
- Standard 0-10V dimming driver, 120-277V MVOLT, 80 CRI
- Suitable for dry or damp locations
- Meets all ADA requirements
- Buy American Act Compliant

## Dimensions

Width	Height	Depth
24"	6"	4"
48"	6"	4"

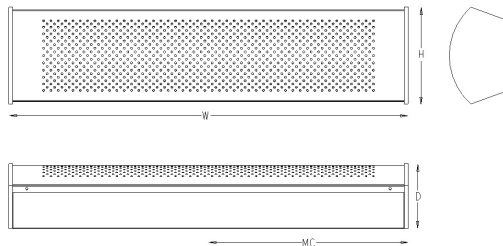

A 4" octagonal junction box should be used for installation

MC = Mounting Center, located at center of fixture unless noted otherwise

## Ordering Information/Options

Model	Length	Watts			Finishes		Options	
364	24	LED10	1500 Lumens	MVOLT	WHT	White	DL	Damp Label
		LED15	2400 Lumens		BLK	Black	30K	3000 Kelvin Temperature
		LED22	3600 Lumens		SAL	Silver	35K	3500 Kelvin Temperature
	48	LED17	2700 Lumens	MVOLT	BRZ	Bronze	40K	4000 Kelvin Temperature
		LED30	4900 Lumens		BA	Brushed Aluminum	IEM	Integral Emergency Pack
		LED42	6900 Lumens		RAL**	RAL Custom Color		

\*\* Consult factory for RAL Custom Color adder

**Indessa**  
Lighting

PHONE: 509.924.0243

www.indessa.com

Indessa Lighting reserves the right to make design revisions without prior notice.

