


# 418 Picture Frame

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Catalog Number	MODEL	WATTS	FINISH	OPTION(S)
Example: 418-1LED14-BRZ-30K	418	-	-	-

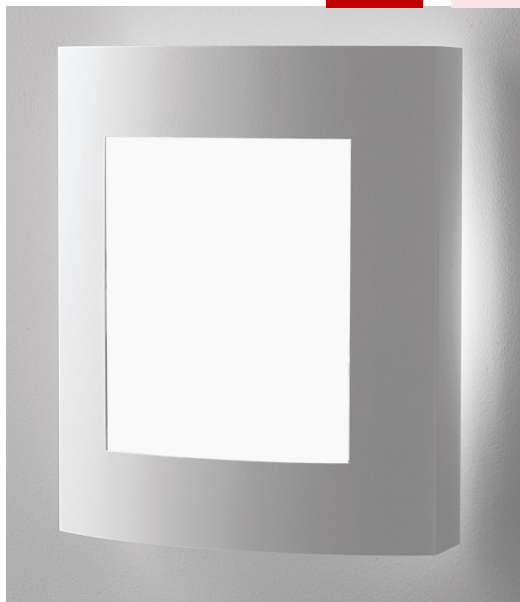


This luminous sconce utilizes textured white acrylic to maximize uniformity on the lens. Metal frames the acrylic, providing a finished appearance.

## Features:

- A soft, elegant look for general applications
- Textured acrylic diffuser and double lens obscures lamp image. Bottom lens standard
- No visible fasteners
- Suitable for dry or damp locations
- Standard 0-10V dimming driver, 120-277V MVOLT, 80 CRI
- Meets all ADA requirements
- Buy American Act Compliant

## Dimensions

Width	Height	Depth	MC
9.25"	11"	4"	5.25"

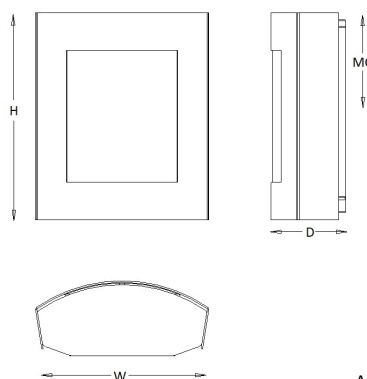

A 4" octagonal junction box should be used for installation

MC = Mounting Center, located at center of fixture unless noted otherwise

## Ordering Information/Options

Model	Watts			Finishes		Options	
418	1LED9	1100 Lumens	MVOLT	WHT	White	DL	Damp Label
	1LED14	1550 Lumens		BLK	Black	TL	Top Lens
	1LED19	2000 Lumens		SAL	Silver	30K	3000 Kelvin Temperature
				BRZ	Bronze	35K	3500 Kelvin Temperature
						40K	4000 Kelvin Temperature

**Indessa**  
Lighting

PHONE: 509.924.0243

www.indessa.com

Indessa Lighting reserves the right to make design revisions without prior notice.

