


# 425 Window Box

Project: \_\_\_\_\_

Location: \_\_\_\_\_


Catalog Number	MODEL	WATTS	FINISH	OPTION(S)
Example: 425-1LED14-SAL-LBLUE-35K	<b>425</b>	-	-	-

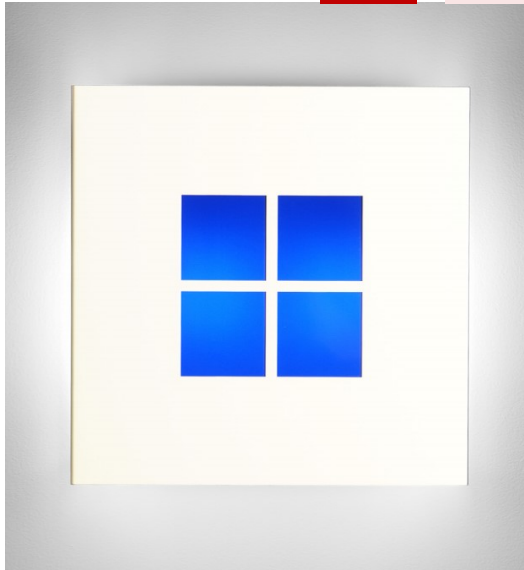

### Features:

- Classical box sconce for general applications
- All acrylic is mechanically attached for a long, trouble free life. Bottom lens standard
- Standard 0-10V dimming driver, 120-277V MVOLT, 80 CRI
- Suitable for dry or damp locations
- Meets all ADA requirements
- Buy American Act Compliant

### Dimensions

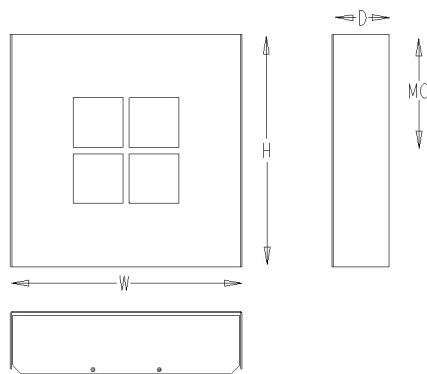

Width	Height	Depth	MC
14"	14"	3.75"	6.25"

The window box is a decorative box which distributes light both up and down with a maximum amount of efficiency. Decorative windows are protected with frosted white acrylic which is mechanically attached to the fixture.

A 4" octagonal junction box should be used for installation

MC = Mounting Center, located at center of fixture unless noted otherwise

### Ordering Information/Options

Model	Watts	Finishes	Options	
425	1LED9	1100 Lumens	<b>WHT</b> White <b>BLK</b> Black <b>SAL</b> Silver <b>BRZ</b> Bronze	<b>DL</b> Damp Label <b>LBLUE</b> Blue Lens <b>LGREEN</b> Green Lens <b>LRED</b> Red Lens <b>TL</b> Top Lens <b>30K</b> 3000 Kelvin Temperature <b>35K</b> 3500 Kelvin Temperature <b>40K</b> 4000 Kelvin Temperature <b>IEM</b> Integral Emergency Pack
	1LED14	1550 Lumens		
	1LED19	2200 Lumens		
		MVOLT		