


506 Super Size Extended

Project: _____

Location: _____

| Catalog Number | MODEL | LENGTH/WATTS | FINISH | BAR CONFIG | OPTION(S) |
|---------------------------------|------------|--------------|--------|------------|-----------|
| Example: 506-24LED20-BRZ-NB-30K | 506 | - | - | - | - |

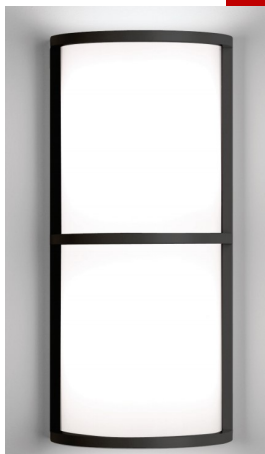



This popular wall sconce is a timeless classic. Constructed of solid bar stock, this product is available with a number of bar configurations. This larger fixture is an ideal luminaire for building entrances and outdoor walkways.

Features:

- Extended lengths of our popular Super Size Classic
- Larger size is ideal for large scale walls
- Solid bar stock for maximum strength and rigidity
- 1/8" extruded, opal acrylic front lens. Bottom lens standard
- No visible fasteners
- Standard 0-10V dimming driver, 120-277V MVOLT, 80 CRI
- Listed and approved for wet locations
- Buy American Act Compliant

Dimensions


| Width | Height | Depth |
|-------|--------|-------|
| 9" | 19.5" | 5.25" |
| 9" | 24" | 5.25" |
| 9" | 36" | 5.25" |
| 9" | 48" | 5.25" |

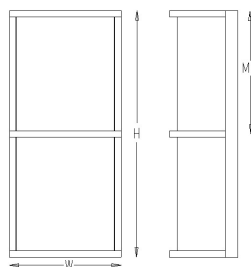

A 4" octagonal junction box should be used for installation

MC = Mounting Center, located at center of fixture unless noted otherwise

Bar Options

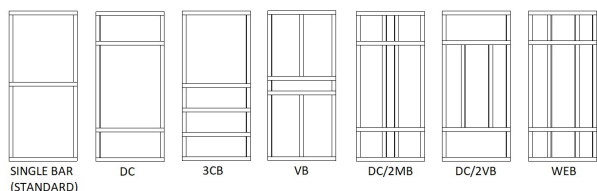

Ordering Information/Options

| Model | Length | Watts | Finishes | Bar Config | Options | | |
|-------|--------|-------|-------------|--|---|---|-------|
| 506 | 19 | LED9 | 1100 Lumens | WHT White BLK Black SAL Silver BRZ Bronze BA Brushed Aluminum | NB Standard Single Bar DC No Bar 3CB Double Cross Bar 3CB 3 Lower Cross Bars VB Vertical Bar DC/1MB Dbl Cross w/ 1 Middle Bar DC/2MB Dbl Cross w/ 2 Middle Bars DC/2VB Dbl Cross w/ 2 Vert Bars WEB Dbl Cross w/2 Full Vert Bars | TC Top Cover BC Bottom Cover PC Photo Cell (TC required) 30K 3000 Kelvin Temp 35K 3500 Kelvin Temp 40K 4000 Kelvin Temp IEM Integral Em Pack | |
| | | LED14 | 1550 Lumens | | | | MVOLT |
| | | LED19 | 2000 Lumens | | | | |
| | | LED23 | 2500 Lumens | | | | |
| 24 | | LED15 | 1700 Lumens | | | | |
| | | LED20 | 2300 Lumens | MVOLT | | | |
| | | LED24 | 2900 Lumens | | | | |
| | | LED23 | 2500 Lumens | | | | |
| 36 | | LED28 | 3300 Lumens | MVOLT | | | |
| | | LED36 | 4300 Lumens | | | | |
| 48 | | LED28 | 3300 Lumens | | | | |
| | | LED39 | 4700 Lumens | MVOLT | | | |
| | | LED48 | 5700 Lumens | | | | |

Indessa
Lighting

PHONE: 509.924.0243

www.indessa.com

Indessa Lighting reserves the right to make design revisions without prior notice.

