

# 512 Large Classic ADA

Project: \_\_\_\_\_

Location: \_\_\_\_\_

| Catalog Number               | MODEL | LENGTH/WATTS | FINISH | BAR CONFIG | OPTION(S) |
|------------------------------|-------|--------------|--------|------------|-----------|
| Example: 512-12LED19-BRZ-30K | 512   | -            | -      | -          | -         |




This unique shape in the timeless Classic Series provides depth and dimension to an otherwise monotonous shape. Constructed of solid aluminum bar with an extruded textured lens, the fixture will provide years of trouble free operation.

## Features:


- Our popular Large Classic design in an ADA compliant fixture
- A variety of standard lengths available
- 1/8" textured, opal acrylic front lens. Bottom lens standard
- Standard 0-10V dimming driver, 120-277V MVOLT, 80 CRI
- Listed and approved for wet locations
- Meets all ADA requirements
- Buy American Act Compliant

## Dimensions

| Width | Height | Depth |
|-------|--------|-------|
| 12"   | 12"    | 4"    |
| 12"   | 24"    | 4"    |
| 12"   | 36"    | 4"    |
| 12"   | 48"    | 4"    |

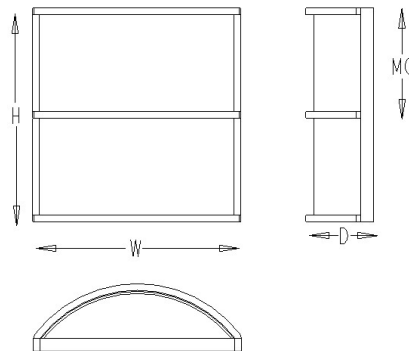

## Bar Options

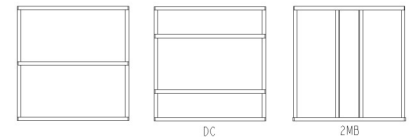

A 4" octagonal junction box should be used for installation

MC = Mounting Center, located at center of fixture unless noted otherwise

## Ordering Information/Options

| Model | Length | Watts |             |       | Finishes |                         | Bar Config |                     | Options                 |                         |
|-------|--------|-------|-------------|-------|----------|-------------------------|------------|---------------------|-------------------------|-------------------------|
| 512   | 12     | LED9  | 1100 Lumens | MVOLT | WHT      | White                   | NB         | Standard Single Bar | TC                      | Top Metal Cover         |
|       |        | LED14 | 1550 Lumens |       | BLK      | Black                   |            | No Bar              | BC                      | Bottom Metal Cover      |
|       |        | LED19 | 2000 Lumens |       | SAL      | Silver                  |            | DC                  | Double Cross Bar        | PC                      |
|       | 24     | LED15 | 1700 Lumens | MVOLT | BRZ      | Bronze                  | 2MB        | 2 Middle Bars       | 30K                     | 3000 Kelvin Temperature |
|       |        | LED20 | 2300 Lumens |       | BA       | Brushed Aluminum        |            | 35K                 | 3500 Kelvin Temperature |                         |
|       |        | LED24 | 2900 Lumens |       | 40K      | 4000 Kelvin Temperature |            |                     |                         |                         |
|       | 36     | LED22 | 2600 Lumens | MVOLT |          |                         |            |                     | IEM                     | Integral Emergency Pack |
|       |        | LED28 | 3300 Lumens |       |          |                         |            |                     |                         |                         |
|       |        | LED36 | 4300 Lumens |       |          |                         |            |                     |                         |                         |
|       | 48     | LED28 | 3300 Lumens | MVOLT |          |                         |            |                     |                         |                         |
|       |        | LED39 | 4700 Lumens |       |          |                         |            |                     |                         |                         |
|       |        | LED48 | 5700 Lumens |       |          |                         |            |                     |                         |                         |

**Indessa**  
Lighting

PHONE: 509.924.0243

www.indessa.com

Indessa Lighting reserves the right to make design revisions without prior notice.

