


522 Wet Loc Window Box

Project: _____

Location: _____

Catalog Number	MODEL	WATTS	FINISH	OPTION(S)
Example: 522-1LED14-BRZ-30K	522	-	-	-

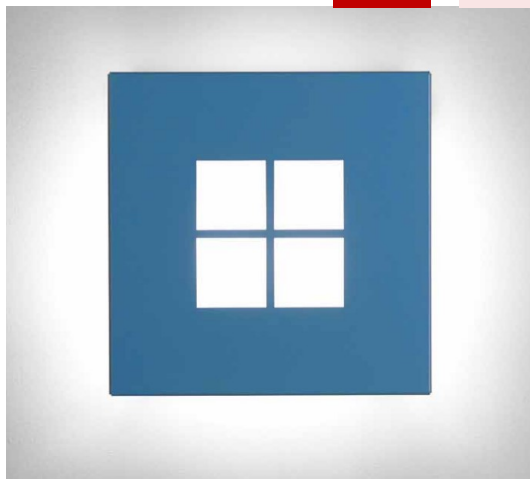


Providing light both upwards and downwards, this appealing fixture significantly highlights a building's architecture at night and during the daylight hours.

Features:

- Modern "light marker" with enhancing light windows
- Colored lens available
- Fully enclosed and gasketed fixture
- No visible fasteners
- All lens mechanically attached for long life retention
- Standard 0-10V dimming driver, 120-277V MVOLT, 80 CRI
- Listed and approved for wet locations
- Buy American Act Compliant

Dimensions

Width	Height	Depth	MC
14"	14"	5"	6.5"

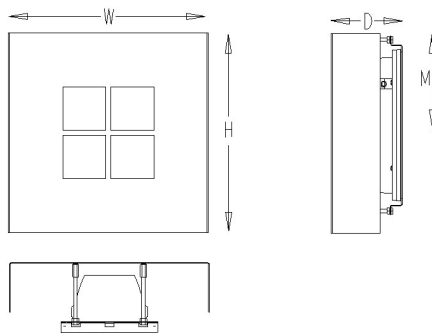

A 4" octagonal junction box should be used for installation

MC = Mounting Center, located at center of fixture unless noted otherwise

Ordering Information/Options

Model	Watts	Finishes	Options
522	1LED9	1100 Lumens	TP Tamperproof Nuts LBLUE Blue Lens LGREEN Green Lens LRED Red Lens 1WIN One 8" window MOD18 18"x18" fixture 30K 3000 Kelvin Temperature 35K 3500 Kelvin Temperature 40K 4000 Kelvin Temperature IEM Integral Emergency Pack
	1LED14	1550 Lumens	
	1LED19	2000 Lumens	
	1LED23	2500 Lumens	
		MVOLT	
		WHT White	
		BLK Black	
		SAL Silver	
		BRZ Bronze	

Indessa
Lighting

PHONE: 509.924.0243

www.indessa.com

Indessa Lighting reserves the right to make design revisions without prior notice.

