

556 Wet Loc Defender

Project: _____

Location: _____

Catalog Number	MODEL	WATTS	FINISH	OPTION(S)
Example: 556-1LED14-SAL-40K	556	-	-	-




The Defender directs light out of all sides with the majority of the light directed up and down. Nine stylish windows provide a strong accent to the fixture

Features:

- Contoured fixture for maximum visual appearance and light output
- Custom laser cut images available. Consult factory for pricing
- Fully enclosed and gasketed fixture
- No visible fasteners
- Standard 0-10V dimming driver, 120-277V MVOLT, 80 CRI
- Listed and approved for wet locations
- Buy American Act Compliant

Dimensions

Width	Height	Depth	MC
14"	14"	5.5"	6.5"

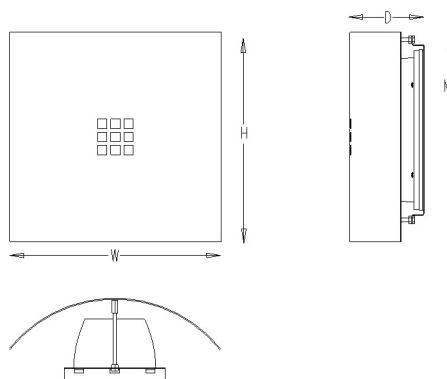

A 4" octagonal junction box should be used for installation

MC = Mounting Center, located at center of fixture unless noted otherwise

Ordering Information/Options

Model	Watts			Finishes		Options	
556	1LED9	1100 Lumens	MVOLT	WHT	White	TP	Tamperproof Nuts
	1LED14	1550 Lumens		BLK	Black	1WIN	One 8" window
	1LED19	2000 Lumens		SAL	Silver	NOWIN	No Window
	1LED23	2500 Lumens		BRZ	Bronze	30K	3000 Kelvin Temperature
					35K	3500 Kelvin Temperature	
					40K	4000 Kelvin Temperature	
					IEM	Integral Emergency Pack	

Indessa
Lighting

PHONE: 509.924.0243

www.indessa.com

Indessa Lighting reserves the right to make design revisions without prior notice.

