

# 562 Wet Loc Half Cylinder

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Catalog Number	MODEL	WATTS	FINISH	OPTION(S)
Example: 562-1LED14-BLK-40K	<b>562</b>	-	-	-





This Half Cylinder directs the majority of its light upward and downward. Ideally suited for illuminating columns, the fixture is completely sealed and gasketed ensuring long life performance.

### Features:

- Narrow, attractive fixture is ideal for mounting on columns
- Custom laser cut images available. Consult factory for pricing
- Fully enclosed and gasketed fixture
- No visible fasteners
- Standard 0-10V dimming driver, 120-277V MVOLT, 80 CRI
- Listed and approved for wet locations
- Buy American Act Compliant

### Dimensions

Width	Height	Depth	MC
8.875"	14"	4.625"	6.5"

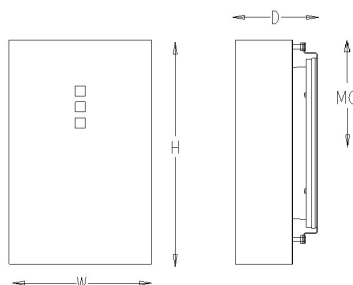

A 4" octagonal junction box should be used for installation

MC = Mounting Center, located at center of fixture unless noted otherwise

### Ordering Information/Options

Model	Watts	Finishes	Options
562	1LED9	1100 Lumens	WHT White
	1LED14	1550 Lumens	BLK Black
	1LED19	2000 Lumens	SAL Silver
	1LED23	2500 Lumens	BRZ Bronze
		MVOLT	TP Tamperproof Nuts
			NOWIN No Window
			30K 3000 Kelvin Temperature
			35K 3500 Kelvin Temperature
			40K 4000 Kelvin Temperature