

574 Softglow

Project: _____

Location: _____

Catalog Number	MODEL	WATTS	FINISH	OPTION(S)
Example: 574-1LED19-WHT-35K	574	-	-	-





A soft glow around the center band of the luminaire provides drama to this rectangular shaped fixture. Add additional character with a two tone powder coat finish.

Features:

- An ideal luminaire for retail lighting marking and highlighting a building
- Design provides a soft glow around the center band of the fixture
- Available "DKSKY" option for areas requiring dark sky compliancy
- Design allows for two-tone powder coat finishes
- Fully enclosed and gasketed electrical compartment
- Standard 0-10V dimming driver, 120-277V MVOLT, 80 CRI
- Listed and approved for wet locations
- Buy American Act Compliant

Dimensions

Width	Height	Depth	MC
15.3"	14"	6.375"	6.5"

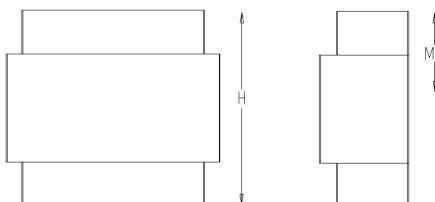

A 4" octagonal junction box should be used for installation

MC = Mounting Center, located at center of fixture unless noted otherwise

Ordering Information/Options

Model	Watts	Finishes	Options
574	1LED9	1100 Lumens	TP Tamperproof Nuts 2TONE Two Tone Powder Coat Finish 30K 3000 Kelvin Temperature 35K 3500 Kelvin Temperature 40K 4000 Kelvin Temperature DKSKY Dark Sky Compliant IEM Integral Emergency Pack
	1LED14	1550 Lumens	
	1LED19	2000 Lumens	
	1LED23	2500 Lumens	
	MVOLT	WHT White BLK Black SAL Silver BRZ Bronze	

Indessa
Lighting

PHONE: 509.924.0243

www.indessa.com

Indessa Lighting reserves the right to make design revisions without prior notice.

