


# 607 Pantheon

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Catalog Number	MODEL	LENGTH/WATTS	FINISH	OPTION(S)
Example: 607-48LED28-BLK-35K	607	-	-	-


\*Photo shown  
with optional Top  
and Bottom Cap

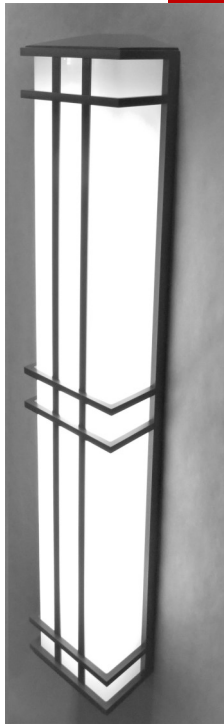

With its square, columnar design, the Pantheon is a sophisticated looking fixture. 1/2" thick milled top and bottom endcaps provide extra detail and sets this fixture apart from other sconces.

## Features:

- Milled endcaps add detail to this sophisticated fixture
- Cage constructed of solid bar stock for strength and rigidity
- Additional bar configurations available. Consult factory for pricing
- 1/8" formed acrylic lens
- Standard 0-10V dimming driver, 120-277V MVOLT, 80 CRI
- Listed and approved for wet locations
- Meets all ADA requirements
- Buy American Act Compliant

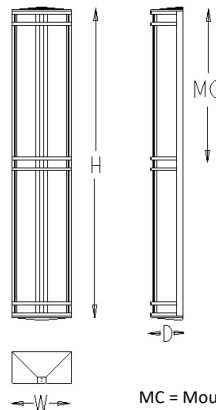

## Dimensions

Width	Height	Depth
6.625"	18" *	4"
6.625"	24" *	4"
6.625"	36"	4"
6.625"	48"	4"

\*No center bars on fixtures less than 36" in height

A 4" octagonal junction box should be used for installation

MC = Mounting Center, located at center of fixture unless noted otherwise

## Ordering Information/Options

Model	Length	Watts			Finishes		Options	
607	18	LED9	1100 Lumens	MVOLT	WHT	White	TC	1/2” thick milled aluminum Top Cap
		LED14	1550 Lumens		BLK	Black	BC	1/2” thick milled aluminum Bottom Cap
		LED20	2300 Lumens		SAL	Silver	PC	Photo Cell (TC required)
	24	LED15	1700 Lumens	MVOLT	BRZ	Bronze	30K	3000 Kelvin Temperature
		LED20	2300 Lumens		BA	Brushed Aluminum	35K	3500 Kelvin Temperature
		LED24	2900 Lumens				40K	4000 Kelvin Temperature
	36	LED22	2600 Lumens	MVOLT			IEM	Integral Emergency Pack
		LED28	3300 Lumens					
		LED36	4300 Lumens					
	48	LED28	3300 Lumens	MVOLT				
		LED39	4700 Lumens					
		LED48	5700 Lumens					

Indessa  
Lighting

PHONE: 509.924.0243

www.indessa.com

Indessa Lighting reserves the right to make design revisions without prior notice.

