

609 Shield

Project: _____

Location: _____

Catalog Number	MODEL	LENGTH/WATTS	FINISH	OPTION(S)
Example: 609-36LED23-BA-35K	609	-	-	-




Features:

- 1 1/4" wide aluminum bars make for an extremely rigid fixture
- 1/8" formed acrylic lens. Bottom lens standard
- Standard 0-10V dimming driver, 120-277V MVOLT, 80 CRI
- Listed and approved for wet locations
- Meets all ADA requirements
- Buy American Act Compliant

Dimensions

Width	Height	Depth
6.5"	24"	4"
6.5"	36"	4"

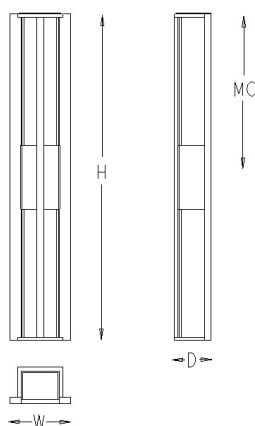

A 4" octagonal junction box should be used for installation
MC = Mounting Center, located at center of fixture unless noted otherwise

With side bars constructed from 1 1/4" wide aluminum bar, the Shield makes a bold architectural statement. The clean, rectangular design of this fixture will enhance any building.

Ordering Information/Options

Model	Length	Watts	Finishes	Options				
609	24	LED15	1700 Lumens	WHT White	TC Top Cover			
		LED20	2300 Lumens			MVOLT	BLK Black	BC Bottom Cover
		LED22	2600 Lumens			SAL Silver	30K 3000 Kelvin Temperature	
609	36	LED20	2300 Lumens	BRZ Bronze	35K 3500 Kelvin Temperature			
		LED23	2800 Lumens			MVOLT	BA Brushed Aluminum	40K 4000 Kelvin Temperature
		LED29	3400 Lumens					

Indessa
Lighting

PHONE: 509.924.0243

www.indessa.com

Indessa Lighting reserves the right to make design revisions without prior notice.

