


# 645 Lighthouse

**Project:** \_\_\_\_\_

**Location:** \_\_\_\_\_

Catalog Number	MODEL	LENGTH/WATTS	FINISH	OPTION(S)
Example: 645-16LED19-BA-40K	645	-	-	-

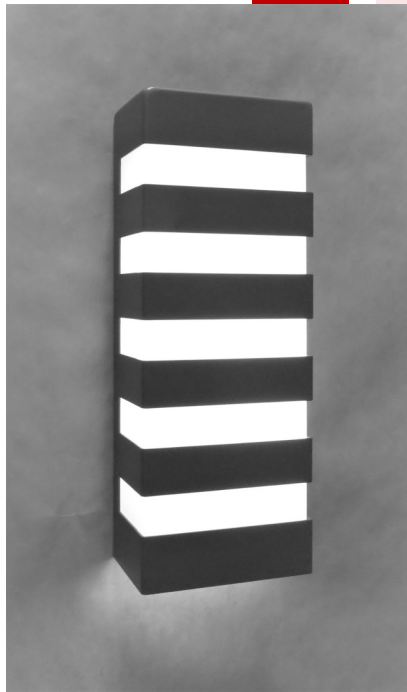


This compact fixture provides a generous amount of light, making it perfect for illuminating entryways. Rugged construction guarantees years of trouble free operation.

## Features:

- Compact design providing a generous amount of light
- Welded and sanded top cover for a seamless appearance
- Bottom lens standard
- Standard 0-10V dimming driver, 120-277V MVOLT, 80 CRI
- Listed and approved for wet locations
- Meets all ADA requirements
- Buy American Act Compliant

## Dimensions

Width	Height	Depth
6"	16"	4"

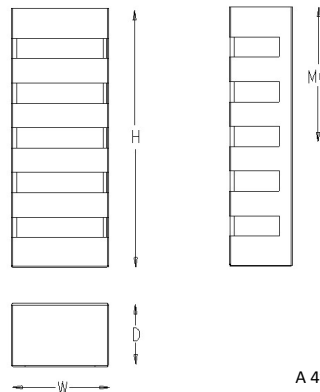

A 4" octagonal junction box should be used for installation

MC = Mounting Center, located at center of fixture unless noted otherwise

## Ordering Information/Options

Model	Length	Watts			Finishes		Options	
645	16	LED9	1100 Lumens	MVOLT	WHT	White	BC	Bottom Cover
		LED14	1550 Lumens		BLK	Black	PC	Photo Cell
		LED19	2000 Lumens		SAL	Silver	30K	3000 Kelvin Temperature
					BRZ	Bronze	35K	3500 Kelvin Temperature
					BA	Brushed Aluminum	40K	4000 Kelvin Temperature
							IEM	Integral Emergency Pack

**Indessa**  
Lighting

PHONE: 509.924.0243

www.indessa.com

Indessa Lighting reserves the right to make design revisions without prior notice.

