

348 Nova

Project: _____

Location: _____


| Catalog Number | MODEL | LENGTH/WATTS | FINISH | OPTION(S) |
|------------------------------------|------------|--------------|--------|-----------|
| Example: 348-25LED12-BLK-50/50-40K | 348 | - | - | - |



Features:

- Made from 0.080" aluminum
- Available in brushed aluminum or powder coat finish
- Standard 0-10V dimming driver, 120-277V MVOLT, 80 CRI
- Suitable for dry or damp locations
- Meets all ADA requirements
- Buy American Act Compliant

| Dimensions | | |
|------------|--------|-------|
| Width | Height | Depth |
| 6.0" | 25.0" | 2.5" |

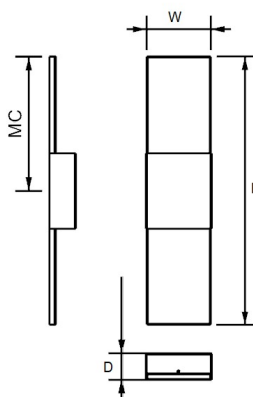

Illuminate high and low with the Nova! Varying intensities of illumination provide the perfect amount of light to be splashed on the surrounding floors and ceilings. A bold back plate provides a blank slate for your custom numbers and letters, or leave it blank for a sharp accent to the surrounding wall.

A 4" octagonal junction box should be used for installation

MC = Mounting Center, located at center of fixture unless noted otherwise

Ordering Information/Options

| Model | Length | Watts | | Finishes | Options | | | |
|-------|--------|-------|-------------|----------|------------------|--------|---------------------------|---------------------------|
| 348 | 25 | LED10 | 1400 Lumens | MVOLT | WHT | White | DL | Damp Label |
| | | LED12 | 1800 Lumens | | BLK | Black | NUM | Vinyl letters and numbers |
| | | LED14 | 2200 Lumens | | SAL | Silver | 50/50 | 50/50 split down/up light |
| | | | | BRZ | Bronze | 70/30 | 70/30 split down/up light | |
| | | | | RAL** | RAL Custom Color | 30/70 | 30/70 split down/up light | |
| | | | | | | 30K | 3000 Kelvin Temperature | |
| | | | | | | 35K | 3500 Kelvin Temperature | |
| | | | | | | 40K | 4000 Kelvin Temperature | |

** Consult factory for RAL Custom Color adder

Indessa
Lighting

PHONE: 509.924.0243

www.indessa.com

Indessa Lighting reserves the right to make design revisions without prior notice.

