

# 509 Large Scale Extended

Project: \_\_\_\_\_

Location: \_\_\_\_\_


| Catalog Number                  | MODEL | LENGTH/WATTS | FINISH | BAR CONFIG | OPTION(S) |
|---------------------------------|-------|--------------|--------|------------|-----------|
| Example: 509-48LED39-SAL-VB-40K | 509   | -            | -      | -          | -         |



This large scale unit in the Classic series is ideal for higher mounting locations. Available in high lumen LEDs, the fixture is perfect for lighting exteriors and walkways.

## Features:


- Our Large Scale Classic fixture sold in a variety of standard lengths
- Solid aluminum bar stock for maximum rigidity and strength
- 1/8" extruded, opal acrylic front lens. Bottom lens standard
- Standard 0-10V dimming driver, 120-277V MVOLT, 80 CRI
- Listed and approved for wet locations
- Buy American Act Compliant

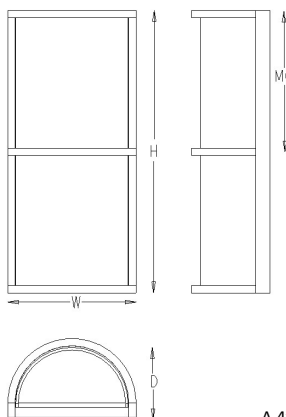

## Dimensions

| Width | Height | Depth |
|-------|--------|-------|
| 12"   | 24"    | 6.75" |
| 12"   | 26"    | 6.75" |
| 12"   | 36"    | 6.75" |
| 12"   | 48"    | 6.75" |

## Bar Options

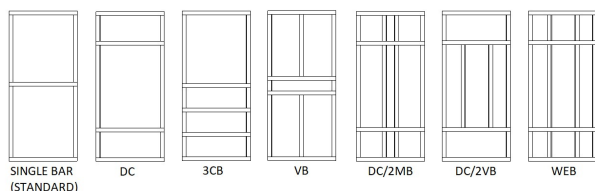

A 4" octagonal junction box should be used for installation

MC = Mounting Center, located at center of fixture unless noted otherwise

## Ordering Information/Options

| Model | Length | Watts |             |       | Finishes |                  | Bar Config |                              | Options |                          |
|-------|--------|-------|-------------|-------|----------|------------------|------------|------------------------------|---------|--------------------------|
| 509   | 24     | LED15 | 1700 Lumens | MVOLT | WHT      | White            |            | Standard Single Bar          | TC      | Top Cover                |
|       |        | LED20 | 2300 Lumens |       | BLK      | Black            | NB         | No Bar                       | BC      | Bottom Cover             |
|       |        | LED24 | 2900 Lumens |       | SAL      | Silver           | DC         | Double Cross Bar             | PC      | Photo Cell (TC required) |
|       | 26     | LED16 | 2000 Lumens | MVOLT | BRZ      | Bronze           | 3CB        | 3 Lower Cross Bars           |         |                          |
|       |        | LED22 | 3100 Lumens |       | BA       | Brushed Aluminum | VB         | Vertical Bar                 | 30K     | 3000 Kelvin Temp         |
|       |        | LED27 | 4000 Lumens |       | RAL**    | RAL Custom Color | DC/1MB     | Dbl Cross w/ 1 Middle Bar    | 35K     | 3500 Kelvin Temp         |
|       | 36     | LED22 | 2600 Lumens | MVOLT |          |                  | DC/2MB     | Dbl Cross w/ 2 Middle Bars   | 40K     | 4000 Kelvin Temp         |
|       |        | LED28 | 3300 Lumens |       |          |                  | DC/2VB     | Dbl Cross w/ 2 Vert Bars     | IEM     | Integral Em Pack         |
|       |        | LED36 | 4300 Lumens |       |          |                  | WEB        | Dbl Cross w/2 Full Vert Bars |         |                          |
|       | 48     | LED28 | 3300 Lumens | MVOLT |          |                  |            |                              |         |                          |
|       |        | LED39 | 4700 Lumens |       |          |                  |            |                              |         |                          |
|       |        | LED48 | 5700 Lumens |       |          |                  |            |                              |         |                          |

\*\* Consult factory for RAL Custom Color adder

**Indessa**  
Lighting

PHONE: 509.924.0243

www.indessa.com

Indessa Lighting reserves the right to make design revisions without prior notice.

