


603 Essex

Project: _____


Location: _____

Catalog Number	MODEL	LENGTH/WATTS	FINISH	OPTION(S)
Example: 603-32LED24-BRZ-30K	603	-	-	-

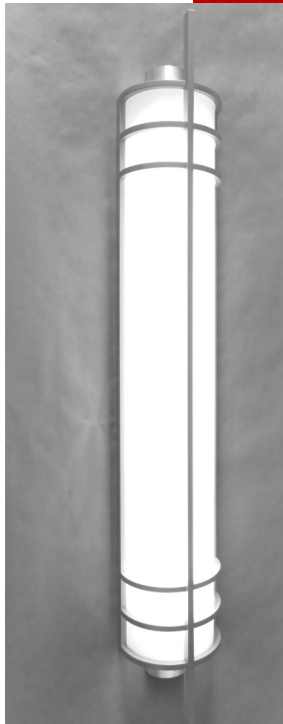

Features:

- This bold fixture adds a dramatic effect to any space
- Cage constructed of solid bar stock for strength and rigidity
- 1/8" extruded, opal acrylic front lens. Bottom lens standard
- Standard 0-10V dimming driver, 120-277V MVOLT, 80 CRI
- Listed and approved for wet locations
- Buy American Act Compliant

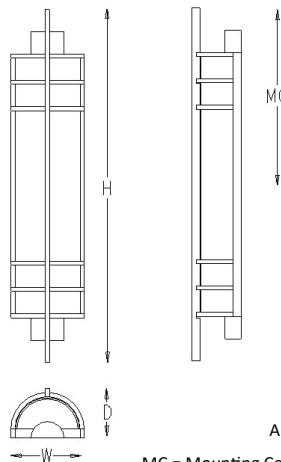

Dimensions		
Width	Height	Depth
6.625"	32"	4.375"
6.625"	44"	4.375"
6.625"	56"	4.375"

With its modern appearance, this wall sconce will add a dramatic effect to your space. Constructed of solid bar stock and available in a variety of lumen packages to fit your lighting needs.

A 4" octagonal junction box should be used for installation

MC = Mounting Center, located at center of fixture unless noted otherwise

Ordering Information/Options

Model	Length	Watts		Finishes		Options		
603	32	LED15	1700 Lumens	MVOLT	WHT	White	TC	Aluminum Top Cover
		LED20	2300 Lumens		BLK	Black	BC	Aluminum Bottom Cover
		LED24	2900 Lumens		SAL	Silver	PC	Photo Cell (TC required)
	44	LED22	2600 Lumens	MVOLT	BRZ	Bronze	30K	3000 Kelvin Temperature
		LED28	3300 Lumens		BA	Brushed Aluminum	35K	3500 Kelvin Temperature
		LED36	4300 Lumens		RAL**	RAL Custom Color	40K	4000 Kelvin Temperature
	56	LED28	3300 Lumens	MVOLT			IEM	Integral Emergency Pack
		LED39	4700 Lumens				ADA	Modified To 4" Depth for ADA Compliance
		LED48	5700 Lumens					

** Consult factory for RAL Custom Color adder

Indessa
Lighting

PHONE: 509.924.0243

www.indessa.com

Indessa Lighting reserves the right to make design revisions without prior notice.

