

619 Flat Top

Project: _____


Location: _____

Catalog Number	MODEL	LENGTH/WATTS	FINISH	OPTION(S)
Example: 619-37ED34-BLK-35K	619	-	-	-



Features:

- Constructed of heavy gauge aluminum for strength and longevity
- Standard 0-10V dimming driver, 120-277V MVOLT, 80 CRI
- Listed and approved for wet locations
- Meets all ADA requirements
- Buy American Act Compliant

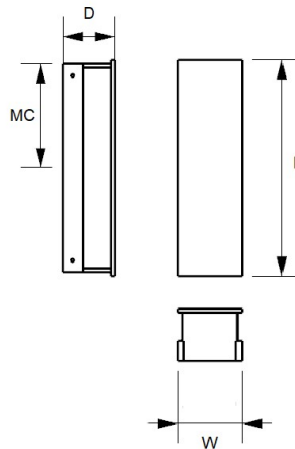

Dimensions

Width	Height	Depth
4"	13.5"	3.25"
4"	25.5"	3.25"
4"	37.5"	3.25"
4"	49.5"	3.25"

A tight compact package of light! The solid front panel gives this fixture a sophisticated, architectural look directing the light outward while minimizing glare. Keep the solid, bold face or have your numbers and letters laser cut in the front.

A 4" octagonal junction box should be used for installation

MC = Mounting Center, located at center of fixture unless noted otherwise

Ordering Information/Options

Model	Length	Watts			Finishes		Options	
619	13	LED11	1600 Lumens	MVOLT	WHT	White	NUM	Laser Cut Numbers
		LED15	2200 Lumens		BLK	Black	30K	3000 Kelvin Temperature
		LED20	2900 Lumens		SAL	Silver	35K	3500 Kelvin Temperature
	25	LED11	1600 Lumens	MVOLT	BRZ	Bronze	40K	4000 Kelvin Temperature
		LED16	2500 Lumens		BA	Brushed Aluminum		
		LED22	3300 Lumens		RAL**	RAL Custom Color		
	37	LED26	4000 Lumens	MVOLT				
		LED34	5200 Lumens					
		LED42	6400 Lumens					
	49	LED35	5300 Lumens	MVOLT				
		LED46	6900 Lumens					
		LED56	8600 Lumens					

** Consult factory for RAL Custom Color adder

Indessa
Lighting

PHONE: 509.924.0243

www.indessa.com

Indessa Lighting reserves the right to make design revisions without prior notice.

