


**Project:** \_\_\_\_\_

**Location:**


<u>Catalog Number</u>	<u>MODEL</u>	<u>LENGTH/WATTS</u>	<u>FINISH</u>	<u>OPTION(S)</u>
Example: 631-14LED19-BLK-35K	631	-	-	-

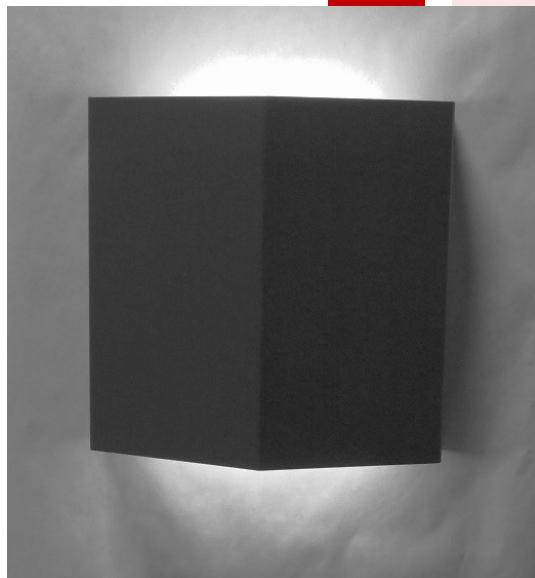


The triangular lines of the Bermuda give depth to this fixture, while the up and down light provide beautiful wall illumination.

### Features:

- A beautiful accent fixture to any building
- Constructed of heavy gauge aluminum for strength and longevity
- Standard 0-10V dimming driver, 120-277V MVOLT, 80 CRI
- Listed and approved for wet locations
- Meets all ADA requirements
- Buy American Act Compliant

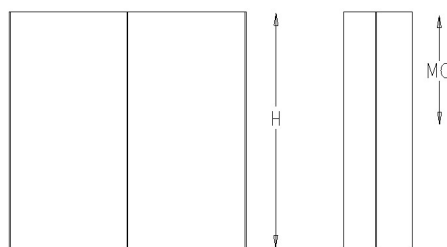

Dimensions		
<u>Width</u>	<u>Height</u>	<u>Depth</u>
14"	14"	4"



A 4" octagonal junction box should be used for installation

MC = Mounting Center, located at center of fixture unless noted otherwise

### Ordering Information/Options

Model	Length	Watts			Finishes		Options	
631	14	LED13	1900 Lumens	MVOLT	WHT	White		50/50 split down/up light (standard)
		LED19	2800 Lumens		BLK	Black	75/25	75/25 split down/up light
		LED25	3700 Lumens		SAL	Silver	25/75	25/75 split down/up light
					BRZ	Bronze	UP	Up Light Only
					RAL**	RAL Custom Color	DOWN	Down Light Only
							30K	3000 Kelvin Temperature
							35K	3500 Kelvin Temperature
							40K	4000 Kelvin Temperature
							IEM	Integral Em Pack

\*\* Consult factory for RAL Custom Color adder

# Indessa

## Lighting

PHONE: 509.924.0243

[www.indessa.com](http://www.indessa.com)

Indessa Lighting reserves the right to make design revisions without prior notice.

