


# 642 Wet Location Fuse

Project: \_\_\_\_\_

Location: \_\_\_\_\_


Catalog Number	MODEL	LENGTH/WATTS	FINISH	OPTION(S)
Example: 642-24LED10-BRZ-40K	<b>642</b>	-	-	-

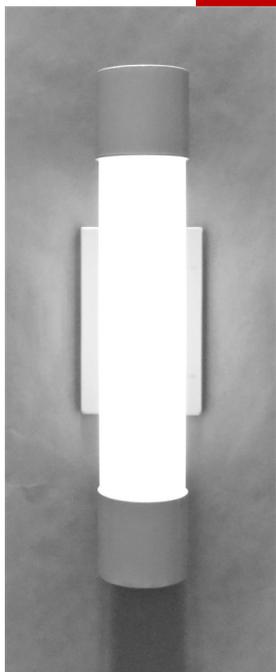

### Features:

- Solid aluminum frame and 3" endcaps highlight this classic design
- Brushed aluminum or powder coated finishes available
- Offered in a wide variety of lumen packages
- Standard 0-10V dimming driver, 120-277V MVOLT, 80 CRI
- Listed and approved for wet locations
- Meets all ADA requirements
- Buy American Act Compliant

### Dimensions

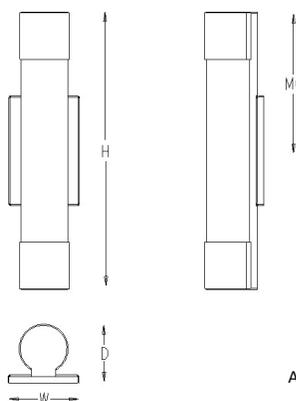

Width	Height	Depth
4.5"	18"	4"
4.5"	24"	4"
4.5"	36"	4"
4.5"	56"	4"

3" endcaps make a bold statement on this simple design. The Fuse provides a stunning accent on columns or in hallways. 18" fixture shown in photo.

A 4" octagonal junction box should be used for installation

MC = Mounting Center, located at center of fixture unless noted otherwise

### Ordering Information/Options

Model	Length	Watts	Finishes	Options						
642	18	LED9	1100 Lumens	MVOLT	WHT White	30K	3000 Kelvin Temperature			
		LED10	1500 Lumens					BLK Black	35K	3500 Kelvin Temperature
		LED16	2500 Lumens					SAL Silver	40K	4000 Kelvin Temperature
24	24	LED10	1500 Lumens	MVOLT	BRZ Bronze	*IEM	Integral Emergency Pack			
		LED16	2500 Lumens					BA Brushed Aluminum		
		LED21	3500 Lumens							
36	36	LED14	2000 Lumens	MVOLT						
		LED20	3000 Lumens							
		LED24	4000 Lumens							
56	56	LED24	4000 Lumens	MVOLT						
		LED32	5600 Lumens							
		LED40	7000 Lumens							

\*IEM not available in 18" fixture length

**Indessa**  
Lighting

PHONE: 509.924.0243

www.indessa.com

Indessa Lighting reserves the right to make design revisions without prior notice.

