

625 Linear

Project: _____

Location: _____

Catalog Number	MODEL	LENGTH/WATTS	FINISH	OPTION(S)
Example: 625-18LED16-BRZ-35K	625	-	-	-




Features:

- Constructed from solid aluminum bar for strength and rigidity
- Welded and sanded edges for a seamless appearance
- Available in a brushed aluminum or powder coat finish
- Bar configurations are completely customizable. Consult factory for options
- Bottom lens standard
- Standard 0-10V dimming driver, 120-277V MVOLT, 80 CRI
- Listed and approved for wet locations
- Meets all ADA requirements
- Buy American Act Compliant

Dimensions

Width	Height	Depth
6.625"	14.5"	4"
6.625"	18"	4"
6.625"	24"	4"

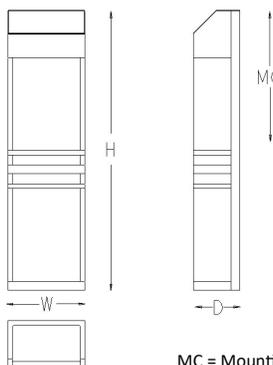

A 4" octagonal junction box should be used for installation

MC = Mounting Center, located at center of fixture unless noted otherwise

Add your own flare with custom decorative bar options. LEDs are housed under the top cap and focused downward to give this fixture a more subtle glow.

Ordering Information/Options

Model	Length	Watts	Finishes	Options		
625	14	LED12	1500 Lumens	MVOLT	WHT White	PC Photo Cell
		LED16	2000 Lumens		BLK Black	30K 3000 Kelvin Temperature
18	18	LED12	1500 Lumens	MVOLT	SAL Silver	35K 3500 Kelvin Temperature
		LED16	2000 Lumens		BRZ Bronze	40K 4000 Kelvin Temperature
24	24	LED12	1500 Lumens	MVOLT	BA Brushed Aluminum	
		LED16	2000 Lumens		RAL** RAL Custom Color	

** Consult factory for RAL Custom Color adder

Indessa
Lighting

PHONE: 509.924.0243

www.indessa.com

Indessa Lighting reserves the right to make design revisions without prior notice.

